

INCREMENTAL ENCODER

- Optical Incremental encoder, Industry Standard Size 58mm
- Synchro Flange or Clamp Flange mounting
- Robustness and excellent resistance to shocks / vibrations
- High protection level IP65, IP67 option with a sealing flange
- Maximum pulses per turn 8 0000ppr
- Universal electronic circuits from 5 to 30 Vdc
- 300 kHz Maximum Frequency



ELECTRICAL CHARACTERISTICS

Output Circuit	RS422 (TTL-compatible)	Push-pull (HTL)
Supply Voltage	5V or 5-30V	5-30V
Current Consumption	40 mA (max)	40 mA (max)
Impulse Frequency	300 kHz (max)	300 kHz (max)
"Low" signal level	VOL < 0,5 V	VOL < 2.5 V
"High" signal level	VOH > 2.5 V	VOH > Vcc - 3 V
EMC	EN61000-6-2 and EN61000-6-4	


MECHANICAL CHARACTERISTICS

Housing	Aluminium
Shaft	Stainless Steel
Bearings	Ballraces
Maximum number of revolutions permitted mechanically	12 000 rpm
Bearings lifetime	1x10 ⁹ rev
Rotor inertia moment	30 gcm ²
Starting Torque	< 1.5 N cm
Maximum load permitted on shaft	Axial 20 N, Radial 50 N
Protection	IP 65
Operating Temperature	-30°...+100° C
Storage Temperature	-40°...+100° C
Shock resistance	100g, 6ms (IEC 68-2-27)
Vibration resistance	100g, 6ms (IEC 68-2-27)
Weight	560g
Axial or radial connection	Cable 2 metres (other cable length available on order)


CONNECTION AND OUTPUT SIGNALS

Function	Cable Colour Code	12 Pin Connector
0 Volt	white	1
+ Volt	brown	2
A	green	3
B	yellow	4
0	grey	5
Ā	pink	6
B̄	blue	7
0̄	red	8
Ground case	shielding	shielding

Output waveforms

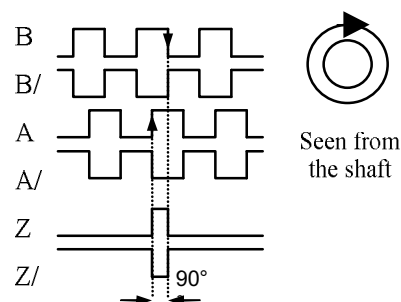


ORDERING CODE



- | | |
|---|--|
| <p>a Series
Incremental Encoder</p> <p>b Shaft Type
2=full shaft</p> <p>c Flange
C=Clamp
S=Synchro</p> <p>d Shaft size
6,8,10mm</p> <p>e Power supply
2= 5Vdc
6= 5-30Vdc</p> | <p>f Output circuit
3 = Driver 5Vdc RS422 (TTL)
5 = Push-Pull 5-30Vdc (HTL)</p> <p>g Pulse perRevolution
1024,2048,4096....</p> <p>h Connector Location
1=Axial
2=Radial</p> <p>j Connection
6= Cable
8= M23 Connector</p> |
|---|--|

MECHANICAL DRAWINGS

Clamping flange , Radial Cable exit 2m

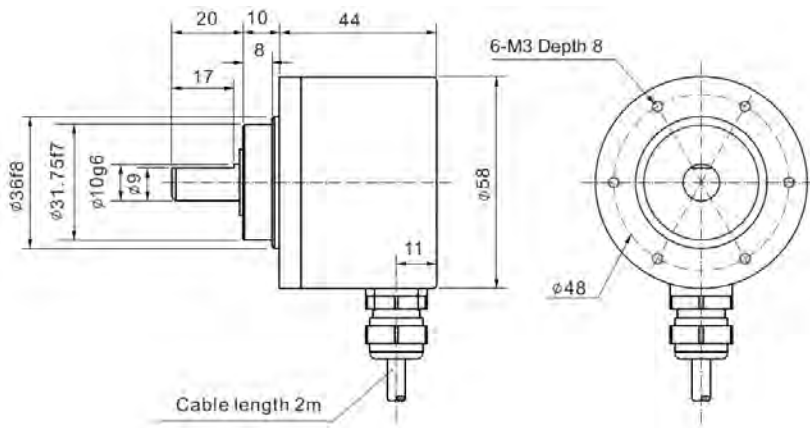

Clamping flange , M23 12pins Connector

