


INCREMENTAL ENCODER

- Magnetic Incremental encoder, Industry Standard Size 99mm
- Blind hollow shaft 15mm with reduction hubs in aluminium of 8,10,12 and 14mm
- Easy mounting for the hollow shafts thanks to DAC (Anti-Coupling Device)
- Robustness and excellent resistance to shocks / vibrations.
- Maximum pulses per turn 16384 ppr
- Universal complementary push-pull (short circuit protected, 7272)
RS422 compatible with 5 V supply voltage



ELECTRICAL CHARACTERISTICS

Output Circuit	RS422 (TTL-compatible)	Push-pull (HTL)
Supply Voltage	5V or 5-30V	5-30V
Current Consumption	40 mA (max)	40 mA (max)
Impulse Frequency	150 kHz (max)	150 kHz (max)
"Low" signal level	VOL < 0,5 V	VOL < 2.5 V
"High" signal level	VOH > 2.5 V	VOH > Vcc – 3 V
EMC	EN61000-6-2 and EN61000-6-4	


MECHANICAL CHARACTERISTICS

Housing	Stainless Steel
Shaft	Stainless Steel
Shaft fixation	Front or Rear clamp
Bearings	Ballraces
Maximum number of revolutions permitted mechanically	3000 rpm
Bearings lifetime	1x10 ¹⁰ rev
Rotor inertia moment	30 gcm ²
Starting Torque	< 0.5 Nm
Maximum load permitted on shaft	Axial 20 N, Radial 50 N
Protection	IP66 / IP67
Operating Temperature	-40...+85° C
Storage Temperature	-40...+85° C
Shock resistance	100g, 6ms (IEC 68-2-27)
Vibration resistance	100g, 6ms (IEC 68-2-27)
Weight	1200 g


CONNECTION AND OUTPUT SIGNALS

Function	Cable Colour Code	12 Pin Connector
0 Volt	white	1
+ Volt	brown	2
A	green	3
B	yellow	4
0	grey	5
Ā	pink	6
B̄	blue	7
0	red	8
Ground case	shielding	shielding

Output waveforms

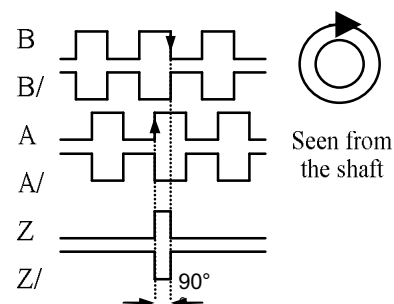

ORDERING CODE



- | | |
|---|--|
| <p>a Series
Magnitec Incremental Encoder</p> <p>b Shaft Type
4=Blind Hollow Shaft</p> <p>d Shaft size
8,10,12,14 and 15mm</p> <p>e Power supply
2= 5Vdc
6= 5-30Vdc</p> <p>f Output circuit
3 = Driver 5Vdc RS422 (TTL)
5 = Push-Pull 5-30Vdc (HTL)</p> | <p>g Pulse per Revolution
1024,2048,4096....</p> <p>h Connector Location
1=Axial
2=Radial</p> <p>j Connection
6= 2m Cable (standard)
8= M23 Connector
9= Terminal Box</p> |
|---|--|

MECHANICAL DRAWINGS

With Radial CABLE - With M23 CONNECTOR

